


# Gram Slotssmedie

## Hydraulik-tanke, standard

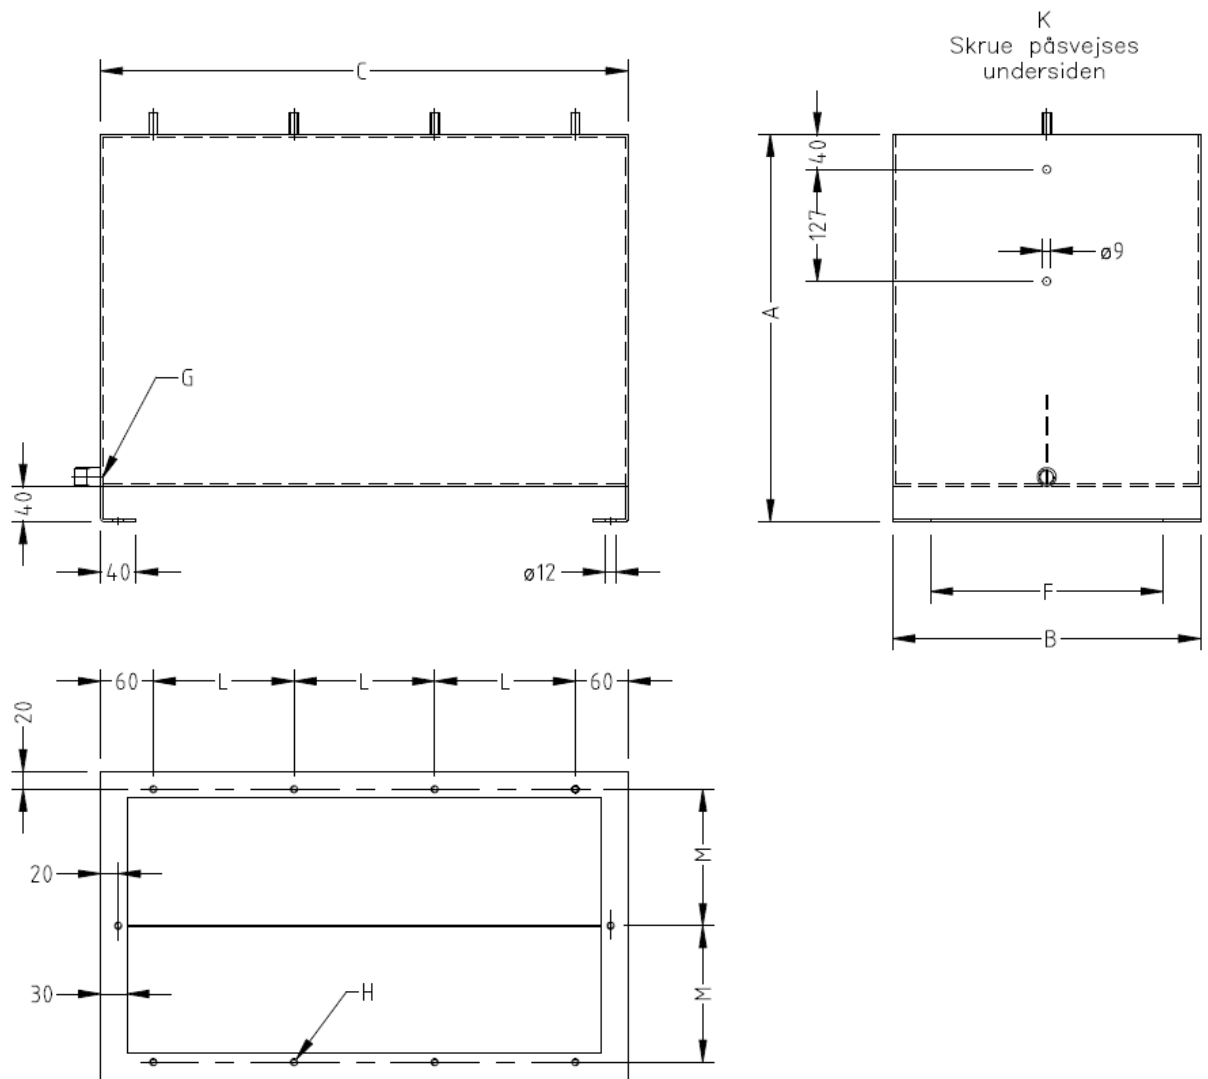

\*

Materiale: Tanken er fremstillet i Domex 240 dekaperet.  
 \* Overfladebehandling: Pulverlakeret ind- og udvendig i sort blank.  
 \* Fra 40 - 150 Ltr.: Er fodbredden/højden 40 mm.

Ltr.	Dimension										Plade-tykkelse		Best. nr.	Pris / stk.(*) Kr.
	A	B	C	F	G	H	K	L	M	N	Gavl mm	Svøb mm		
40	400	355	450	265	1/2"	ø9	M8x20	165	157,5		3	2	HS-40	
60	400	355	675	265	1/2"	ø9	M8x20	185	157,5		3	2	HS-60	
80	410	355	864	265	1/2"	ø9	M8x20	248	157,5		3	2	HS-80	
100	490	450	654	360	3/4"	ø9	M8x20	178	205		3	2	HS-100	
150	490	450	980	360	3/4"	ø9	M8x20	215	205		3	2	HS-150	
200	650	620	675	530	1"	ø11	M10x25	185	193		3	2	HS-200	
300	650	620	1000	530	1"	ø11	M10x25	220	193		3	2	HS-300	
400	750	620	1100	530	1"	ø11	M10x25	245	193		4	3	HS-400	
500	750	620	1400	530	1"	ø11	M10x25	256	193		4	3	HS-500	

