

Digital Test & Datalogging Equipment

MultiHandy 2025

- Two channels, for selectable mA, Voltage or frequency sensor inputs
- 3rd channel for differential or power with Min & Max readings, all on one backlit LCD screen
- Rate, frequency & counting options
- Fast USB upload to HYDROcom6 software
- Rugged plastic housing & carry strap



The new MultiHandy 2025 replaces the now obsolete MultiHandy 2020, which after eight years of being the industry standard entry level two channel hydraulic datalogger, has now been radically upgraded with more features, memory & measuring flexibility.

R & D
Mobile hydraulics
End of Line Testing
Plant maintenance
Industrial hydraulics

DIGITAL TEST & DATALOGGING EQUIPMENT

MultiHandy 2025

Ease of Use

Still as user friendly as ever, just plug in the sensors - switch on - measure. No programming necessary when using Hydrotechnik ISDS (Intelligent Sensor Detection System) sensors.

Flexibility

Two inputs, many opportunities. Hydrotechnik supplies a wide range of accurate and robust ISDS sensors such as pressure (p), temperature (T), combined pressure/temperature (pT), axial turbine and gear flow meters (Q), RPM sensors (n) & much much more. Start with a base kit and build up your sensors to meet your exact needs, both now and in the future. Standard industrial sensors are also compatible with the MultiHandy 2025 via the two configurable input channels. Truly universal.

Performance

Connect – display – record – upload – analyse. The MultiHandy 2025 is intuitive, fast, reliable, robust and importantly accurate at $\pm 0.2\%$ of the full scale reading. Record up to five series of data sets with up to 120,000 values per set. Sampling rates are user selectable from 1ms to 10 seconds, providing performance beyond it's size.

Display and Record

A 3rd virtual channel can display difference between measured values. Measure pressure & flow rate then fluid power (P) in kW can be displayed. Min & max values can be also displayed for all channels. Selectable scanning rates enable recording times up to 330 hours.

Recording & Analysis Software

Hydrotechnik have been the innovators behind fluid/gas digital test and datalogging equipment and software for many years. The MultiHandy 2025 is supplied with the new HYDROlink 6 online PC recording & evaluation software aswell as the industry leading HYDROcom 6 analysis software. Gain more understanding from your measurements with our analysis software that becomes an essential tool for archiving, performance monitoring & quality control.

Back-up and Support

Just as important as great products and service, Hydrotechnik also prides itself on providing quick and effective support to their wide range of global customers. With expert to answer questions quickly, with a huge range of accessories and spares in stock, along with a full UKAS traceable in-house calibration service, Hydrotechnik are the perfect partner.



All Hydrotechnik instruments support ISDS functionality. ISDS is the automatic transmission of parameters and calibration data from Hydrotechnik sensors (with ISDS signal output) to the measuring instrument.



psi Hz Nm gpm Δp mm
V rpm kPa kN mbar ccm A
 $^{\circ}\text{C}$ bar l/min mV $^{\circ}\text{F}$ mm/s

DIGITAL TEST & DATALOGGING EQUIPMENT

MultiHandy 2025

MULTIHANDY 2025 INSTRUMENT & KITS

INSTRUMENT ONLY - PART NUMBER 3160-00-78.00

- MultiHandy 2025 instrument & 2 x AA rechargeable batteries
- Universal mains USB charger & USB cable
- Removable shoulder strap
- Printed Quick Start Manual
- CD ROM with HYDROlink 6 & HYDROcom 6 software and full user manual
- Sturdy plastic carry case with custom foam lining *
* *Optional extra with instrument only option*



TWIN PRESSURE KIT - PART NUMBER 2025p/p-XX*-XX*

- MultiHandy 2025 Instrument Kit as above
- 2 x PR130 standard or PR509 ISDS pressure sensors with 2.5m measuring cable (see below for ordering codes).
- Two off Minimes 1620 female test point to sensor adaptors

Pressure Range	*Replace XX with
0...600 bar (0...8700 psi)	18
0...400 bar (0...5800 psi)	15
0...250 bar (0...3625 psi)	17**
0...60 bar (0...870 psi)	21
-1...+6 bar (-14...+87 psi)	32**

Add -NI to end of kit order code for PR130 standard (non ISDS) pressure sensors

PR130 or PR509 sensors supplied with calibration certificate traceable to UKAS standards on request

*** PR130 standard (non ISDS) sensors supplied - PR100 ISDS available on request (with certificate)*

PRESSURE AND FLOW KIT - PART NUMBER 2025p/Q-XX*-YY*


- MultiHandy 2025 Instrument Kit as above
- 1 x PR130 standard or PR509 ISDS pressure sensor with 2.5m measuring cable (see above for ordering codes).
- 1 x QT500 ISDS flow turbine sensor (see below for ranges & ordering codes). Includes 2.5m long measuring cable.

Flow Range	*Replace YY with
2...75 l/min	70
9...300 l/min	71
16...600 l/min	72

QT500 ISDS sensors supplied with calibration certificate traceable to national standards



Other sensors available from Hydrotechnik UK:

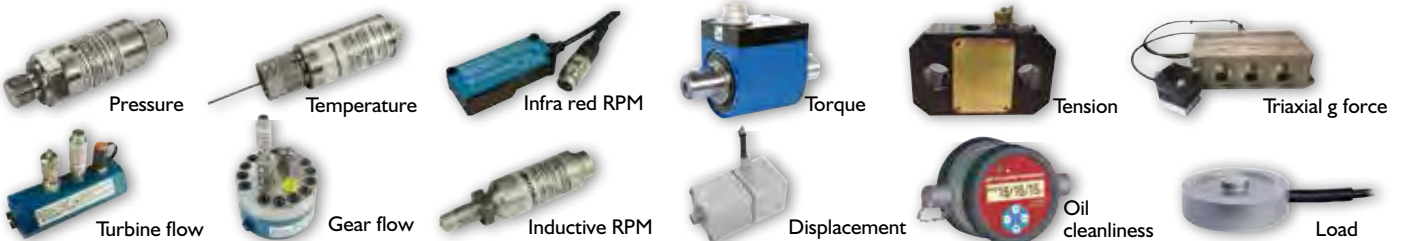


DIGITAL TEST & DATALOGGING EQUIPMENT

MultiHandy 2025

TECHNICAL SPECIFICATIONS

INPUTS	
Channel inputs	Selectable analogue or frequency. ISDS or standard
Signal Inputs	0/4...20mA, 0/2...10V, frequency PnP (rate or count).
Accuracy	Analogue $\pm 0.2\%$ full scale. Frequency $\pm 0.1\%$ of actual reading
Calculated channels	One channel for differential pressure or hydraulic power dependent on sensors connected, Min & Max

INPUT PINOUTS - BOTH CHANNELS			
MI6 6 pin female socket numbered pins 	Designation	Pin	Function
	SIGN_I/SIGN_F	1	Analogue signal input 0/4...20 mA and frequency signal
	GND	2	Ground
	+Ve	3	Sensor power supply
	SIGN_U/SIGN_DIR	4	Analogue signal input 0/2...10V / signal detection direction
	Shield	5	Screen/shield
	ISDS	6	ISDS detection

Notes. mA input 190 Ω / 1nF input impedance. Voltage input 42.1 Ω / 1nF input impedance. Frequency input 100k Ω / 1nF input impedance

DATALOGGING	
Max no. of tests	5
Values per test	up to 120,000 readings per test file
Sampling rate	1 kHz (one sample every 1ms) 12 bit A/D Convertor
Memory capacity	2 Megabytes
Scanning rates	Selectable in five steps: 1ms, 10ms, 100ms, 1s and 10s. Recording times from 1min to 330hrs

INSTRUMENT	
Display	2.5" LCD with backlight
PC interface	USB 2.0 UART (Virtual COM interface)
Power supply unit	110/240V 50/60Hz Universal mains/USB power adaptor (5V and 500mA output)
Battery performance	Ten hours continuous use with two sensors connected. (12 hours to recharge from fully discharged)
Sensor power supply	Nominal 13.8VDC 60mA
Casing/Dimension	ABS plastic (L 201mm x W 90mm x H 52.5mm)
Weight	330g
Protection levels	IP 40. Vibration to IEC 60068-2-64: 1994. Shock to IEC 60068-2-27: 1996-03.
Operating Temp.	-10 to +60 $^{\circ}$ C @ 0 to 80% relative humidity
Storage Temp	-20 to +70 $^{\circ}$ C

DIGITAL TEST & DATALOGGING EQUIPMENT

MultiHandy 2025

THE HYDROTECHNIK HANDHELD DATALOGGING FAMILY

From our entry level 2025 two channel datalogger - all the way up to our powerful eight channel MultiSystem 5060 plus, no matter the application we have a datalogger to suit your requirements and budget.

MULTIHANDY 3020

Robust 3 (+2) channel data logger, for detailed hydraulic diagnosis

- 3 channel instrument with 5 line backlit display
- 2 analogue & 1 frequency channel (ISDS or std.)
- 2 virtual calculation channels (delta p, power etc.)
- Min & Max readings
- 1,000,000 readings memory
- Space for 14 test files
- Record from selectable triggered events
- Supplied with HYDROcom 6 Full software



MULTISYSTEM 4010

Professional 5 (+5) channel data logger, perfect choice for detailed field service hydraulic diagnosis

- 5 channel instrument with bright colour display
- Graph or text display of measurements
- 3 or 4 analogue & 1 or 2 frequency channels (ISDS)
- 5 virtual channels (delta p, power etc & optional CAN)
- Digital I/O for external switching or instrument linking
- Min & Max readings
- Record from selectable triggered events
- 2Gb internal SD card memory
- Space for 100 test files
- Supplied with HYDROcom 6 Advanced software



MULTISYSTEM 5070

The mobile R&D, service tool, all round instrument of choice for industry professionals

- 42 channel instrument with bright colour display
- Graph or Text display of measurements
- 8 analogue (2 selectable as frequency) channels
- Reads most industry sensor outputs for true flexibility
- 32 virtual channels (CANbus signals & calculations)
- Digital I/O for external switching or instrument linking
- Min & Max readings
- Record from selectable triggered events
- 4 Gb internal SD card memory
- USB stick upload or download of tests & settings
- Space for 500 test files
- Supplied with HYDROcom 6 Advanced software



INDUSTRIAL TEST & MEASUREMENT SOLUTIONS

Hydrotechnik UK Ltd is one of the UK's leading test and measurement equipment distributors and manufacturers, servicing a wide range of industries since 1990.

In addition to pressure sensors and instrumentation, Hydrotechnik has a large product portfolio featuring Minimes® test points & adaptors, high pressure microbore hose assemblies and Minimes® test kits for analogue testing, charging, bleeding or sampling of almost any fluid or gas.

We have extensive experience in the design, development, manufacture and commissioning of fluid power test rigs for end of production sign off or component testing. Our test rigs are used in demanding and 'mission critical' applications including defence, manufacturing quality control, plant maintenance and research and development. Users of Hydrotechnik test rigs rigorously test pumps, hydraulic hoses, moulded coolant hoses, pipes, manifolds, tanks, accumulators, valves and many other components to ensure they are fit for purpose.



**Call us on 0800 068 4134 for more information
and to obtain our other brochures:**

