


METRIC FEMALE 24° CONE - S TYPE (1)

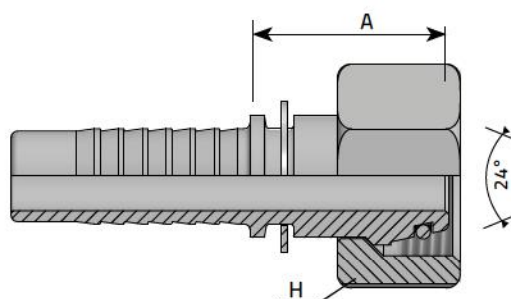


FEMMINA DIRITTA METRICA O-RING 24° DKOS
 FEMELLE DROIT MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S
 DKO-S INNENGEWINDE MIT O-RING 24° KONUS
 HEMBRA MÉTRICA CONO 24° CON O-RING - SERIE S

* CRIMPED NUT
 DADO PINZATO

Code	Tube		Diam	Thread	Dimensions			Pressure	
	D.N.	Hose			D	H	A	Bar	Psi
	Inch		mm	T	mm	mm	mm		
FE0314S6	-3	3/16"	4.8	M14 x 1.5	6	19	25.5	420	6091
FE0316S8	-3	3/16"	4.8	M16 x 1.5	8	19	25.5	420	6091
* FE0414S6	-4	1/4"	6.4	M14 x 1.5	6	17	25.5	450	6526
FE0416S8	-4	1/4"	6.4	M16 x 1.5	8	19	26	450	6526
FE0418S10	-4	1/4"	6.4	M18 x 1.5	10	22	26	450	6526
FE0420S12	-4	1/4"	6.4	M20 x 1.5	12	24	26	450	6526
FE0518S10	-5	5/16"	7.9	M18 x 1.5	10	22	26.5	350	5076
FE0520S12	-5	5/16"	7.9	M20 x 1.5	12	24	26	350	5076
* FE0618S10	-6	3/8"	9.5	M18 x 1.5	10	22	26.5	450	6526
FE0620S12	-6	3/8"	9.5	M20 x 1.5	12	24	26.5	450	6526
FE0622S14	-6	3/8"	9.5	M22 x 1.5	14	27	27	450	6526
FE0822S14	-8	1/2"	12.8	M22 x 1.5	14	27	27.5	420	6091
FE0824S16	-8	1/2"	12.8	M24 x 1.5	16	30	32	420	6091
FE1030S20	-10	5/8"	16	M30 x 2	20	36	37	350	5076
FE1230S20	-12	3/4"	9.5	M30 x 2	20	36	37.5	350	5076

METRIC FEMALE 24° CONE - S TYPE (2)

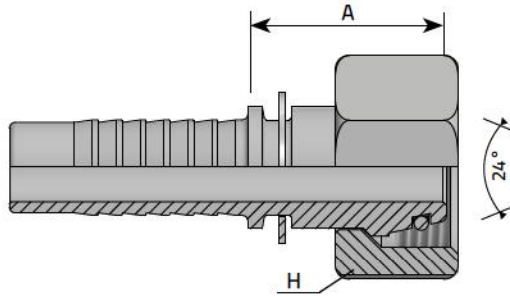

FEMMINA DIRITTA METRICA O-RING 24° DKOS
 FEMELLE DROIT MÉTRIQUE CÔNE 24° AVEC O-RING - SÉRIE S
 DKO-S INNENGEWINDE MIT O-RING 24° KONUS
 HEMBRA MÉTRICA CONO 24° CON O-RING - SERIE S

Code	Tube			Thread	Dimensions			Pressure		
	D.N.	Hose	Diam		T	D	H	A	Bar	Psi
		Inch	mm		mm	mm	mm	mm		
FE1236S25	-12	3/4"	19	M36 x 2	25	46	38.5	350	5076	
FE1636S25	-16	1"	25.4	M36 x 2	25	46	39.5	280	4061	
FE1642S30	-16	1"	25.4	M42 x 2	30	50	40.5	280	4061	
FE2042S30	-20	1.1/4"	31.8	M42 x 2	30	50	41.5	210	3046	
FE2052S38	-20	1.1/4"	31.8	M52 x 2	38	60	47	210	3046	
FE2452S38	-24	1.1/2"	38.1	M52 x 2	38	60	47	185	2683	