

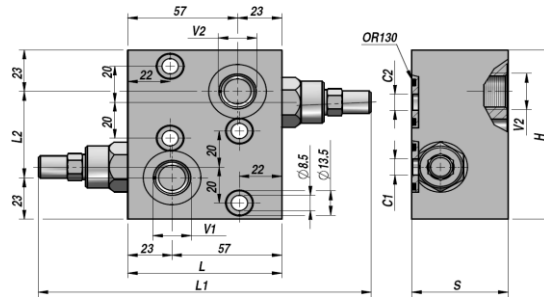


VBCDF-DE (MP-MR)

**DOBBELT VIRKENDE
DOUBLE ACTING**

**OVERCENTER VENTIL FOR MP-MR MOTORER (OMP-OMR)
OVERCENTER VALVE FOR MOTORS MP-MR (OMP-OMR)**



Varenr. Code	V1-V2 BSP	C1-C2	Q MAX l/min	P MAX bar	PILOT RATIO	Type	L	L1	L2	H	S	kg
V2290.F008	1/2"	Ø9	50	350	1:4.5	VBCDF-DE 1/2"-PR	80	172	48	94	50	2,71

Standard indstilling - Standard setting : 320 bar

Minimum indstilling - Minimum setting : 200 bar

PÅ FORESPØRGSEL - ON REQUEST : VBCDF/SF-DE ... MED BREMSE UDLØSNINGSSPORT - WITH BRAKE RELEASE PORT

FLANGE MONTERING

FACE MOUNTING

MATERIALE - MATERIAL : STÅL - STEEL