

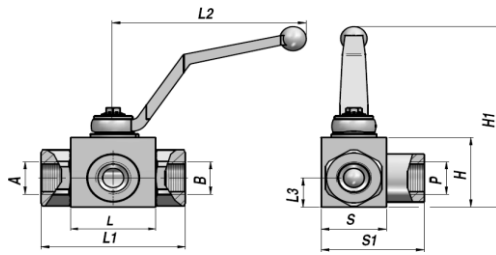


RS 3/T


**3 VEJS KUGLE HANE - ÅBEN CENTER
3-WAY BALL VALVE - OPEN CENTRE**



RS 3/T

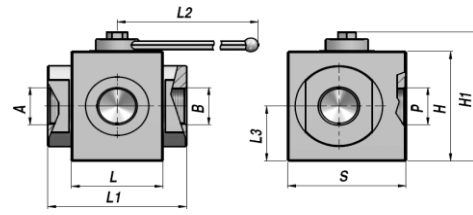

RS3B/T



Varenr. Code	P A-B BSP	Scheme	Q MAX l/min	P MAX bar	Type	L	L1	L2	L3	H	H1	S	S1	kg
DRST304000	1/4"	T	25	400	RS 3/T DN 6	42.4	71	110	14.5	35	91.5	30	48.5	0,54
DRST306000	3/8"	T	35	400	RS 3/T DN10	44.4	73	110	17.4	40	96.5	35	54.5	0,70
DRST308000	1/2"	T	60	350	RS 3/T DN13	48.4	83	110	18	43	99.5	37	58.5	0,83
DRST312000	3/4"	T	100	350	RS 3/T DN20	62.5	95	180	23.4	55	106.5	45	75	1,58
DRST316000	1"	T	160	350	RS 3/T DN25	66.5	112	180	29.5	65	116.5	55	87.5	2,42
DRST320000	1 1/4 -R	T	160	350	RS 3/T DN25	66.5	120	180	29.5	65	116.5	55	87.5	2,60
DRST324000	1 1/2"	T	--	350	RS 3B/T DN40	85	131	300	53.5	107	134.5	115	-	8,63
DRST332000	2"	T	--	350	RS 3B/T DN50	98	140	300	57	114	141.5	128	-	10,61

PÅ FORESPØRGSEL - ON REQUEST : FIXING HOLES

RØRMONTERING
LINE MOUNTING

MATERIALE - MATERIAL : STÅL - STEEL
PÅ FORESPØRGSEL - ON REQUEST : INOX AISI 316