
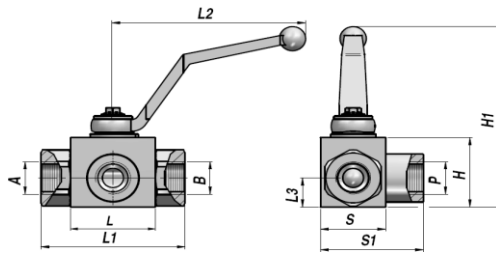



RETNINGSVENTILER - HYDRAULIC DIRECTIONAL CONTROL VALVES

RS 3/L

3 VEJS KUGLE HANE - LUKKET CENTER  
3-WAY BALL VALVE - CLOSED CENTRE



RS3/L

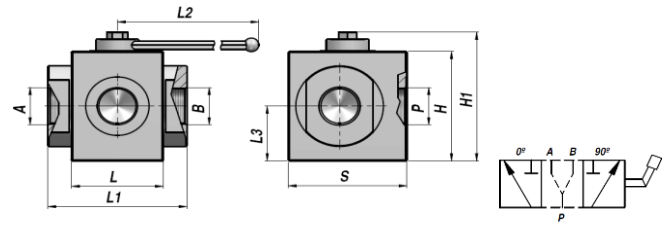

RS3B/L

Varenr. Code	P A-B BSP	Scheme	Q MAX l/min	P MAX bar	Type	L	L1	L2	L3	H	H1	S	S1	kg
DRS3040000	1/4"	L	25	400	RS 3/L DN 6	42.4	71	110	14.5	35	91.5	30	48.5	0,54
DRS3060000	3/8"	L	35	400	RS 3/L DN10	44.4	73	110	17.4	40	96.5	35	54.5	0,70
DRS3080000	1/2"	L	60	350	RS 3/L DN13	48.4	83	110	18	43	99.5	37	58.5	0,83
DRS3120000	3/4"	L	100	350	RS 3/L DN20	62.5	95	180	23.4	55	107	45	75	1,58
DRS3160000	1"	L	160	350	RS 3/L DN25	66.5	112	180	29.5	65	117	55	87.5	2,42
DRS3200000	1"1/4 -R	L	160	350	RS 3/L DN25	66.5	120	180	29.5	65	117	55	87.5	2,60
DRS3240000	1"1/2	L	--	350	RS 3B/L DN40	85	131	300	53.5	107	135	115	-	8,63
DRS3320000	2"	L	--	350	RS 3B/L DN50	98	140	300	57	114	142	128	-	10,61

PÅ FORESPØRGSEL - ON REQUEST : FIXING HOLES

RØRMONTERING  
LINE MOUNTING

MATERIALE - MATERIAL : STÅL - STEEL  
PÅ FORESPØRGSEL - ON REQUEST : INOX AISI 316